


Fig. 1

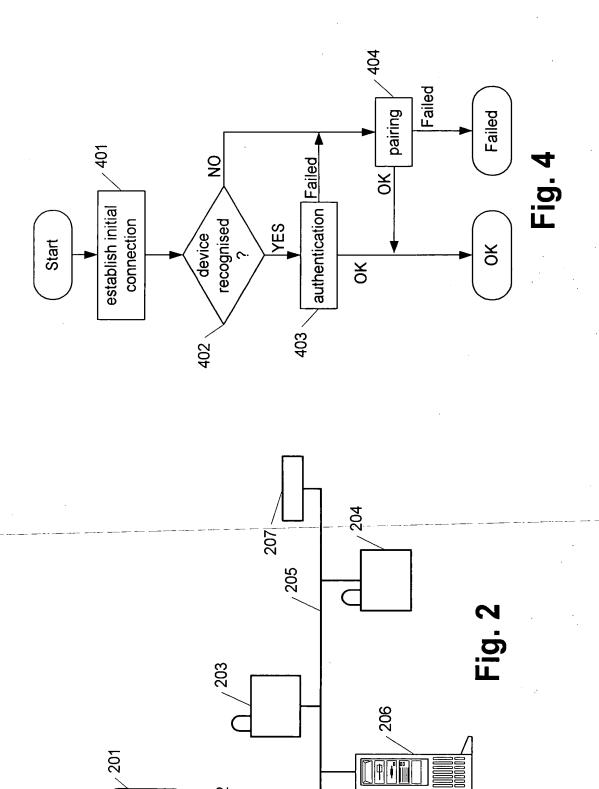

 "UODSOBO" TEOFI

Fig. 3c

Fig. 3a

location representation

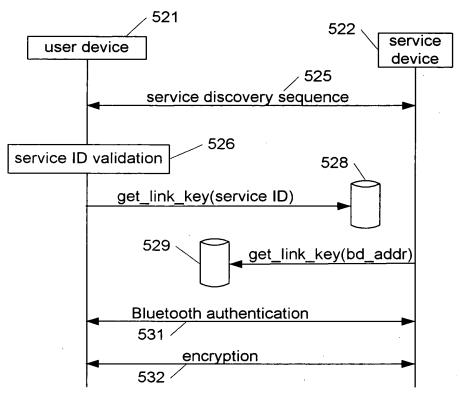


Fig. 5c

601

pairing with initial access

Start

point

602

store group unit key in user

communications device

- 603

distribute group unit key to

service communication

devices

604

connect to any access

point

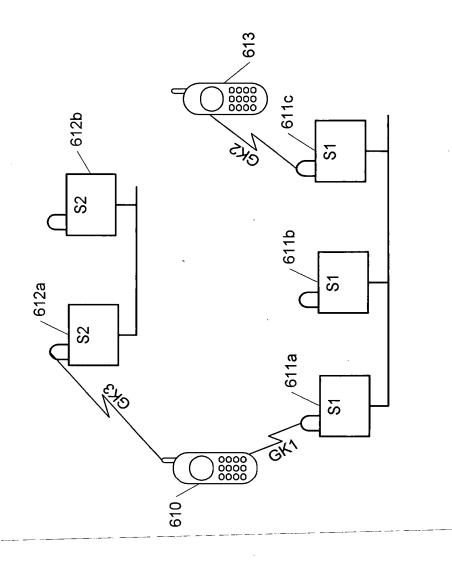


Fig. 6a

Fig. 6b

605

use group unit key for

authentication